

全鎢鋼單頭NC定位鑽頭

SOLID CARBIDE NC POSITIONING DRILL



鎢鋼材質 高硬度、耐摩耗，鑽頂角90°、120°。

Tungsten Carbide material, high hardness, high wear resistance, point angle 90° or 120°

適用材質：

銅一般鋼料、合金鋼、不鏽鋼、銅、鋁、鑄鐵。


Applicable materials:

General steel, alloy steel, stainless steel, copper, aluminum, cast iron.

全鎢鋼單頭NC 定位鑽頭

SOLID TUNGSTEN SINGLE END NC POSITIONING DRILL


型號 EDP NO.	β°	直徑 $\varnothing D$	刃長 L_2	全長 L	柄徑 $\varnothing d$
NSP-9003	90°	3.0	8	38	3.0
NSP-9004	90°	4.0	10	40	4.0
NSP-9005	90°	5.0	15	50	5.0
NSP-9006	90°	6.0	20	60	6.0
NSP-9008	90°	8.0	25	60	8.0
NSP-9010	90°	10.0	25	76	10.0
NSP-9012	90°	12.0	30	76	12.0
NSP-12005	120°	5.0	15	50	5.0
NSP-12006	120°	6.0	20	60	6.0
NSP-12008	120°	8.0	25	60	8.0
NSP-12010	120°	10.0	25	76	10.0
NSP-12012	120°	12.0	30	76	12.0

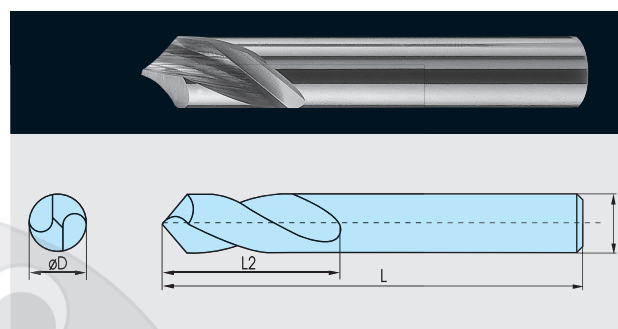

全鎢鋼單頭NC 定位鑽頭

SOLID TUNGSTEN SINGLE END NC POSITIONING DRILL

型號 EDP NO.	β°	A°	直徑 $\varnothing D$	刃徑 $\varnothing D_s$	刃長 L_2	全長 L	柄徑 $\varnothing d$
PNSP-03	90°	118°	3.0	1.5	8	38	3.0
PNSP-04	90°	118°	4.0	2.0	10	40	4.0
PNSP-05	90°	118°	5.0	2.5	12	45	5.0
PNSP-06	90°	118°	6.0	3.0	15	50	6.0
PNSP-08	90°	118°	8.0	4.0	20	60	8.0
PNSP-10	90°	118°	10.0	5.0	22	75	10.0
PNSP-12	90°	118°	12.0	6.0	25	75	12.0
PNSP-16	90°	118°	16.0	8.0	40	100	16.0
PNSPS-08	90°	118°	8.0	4.0	20	50	8.0
PNSPS-10	90°	118°	10.0	5.0	20	50	10.0
PNSPS-12	90°	118°	12.0	6.0	20	50	12.0

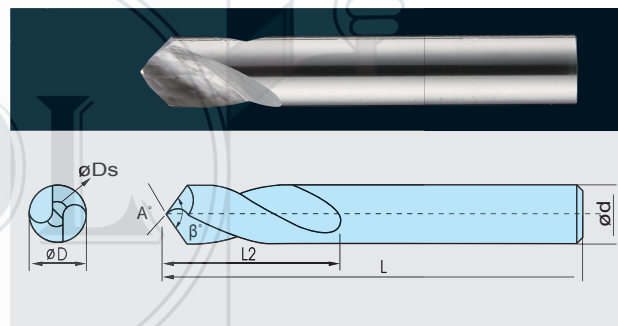

全鎢鋼單頭NC 定位鑽頭

SOLID TUNGSTEN SINGLE END NC POSITIONING DRILL

型號 EDP NO.	β°	A°	直徑 $\varnothing D$	刃徑 $\varnothing D_s$	刃長 L_2	全長 L	柄徑 $\varnothing d$
HNSP-03	90°	140°	3.0	1.5	8	38	3.0
HNSP-04	90°	140°	4.0	2.0	10	40	4.0
HNSP-05	90°	140°	5.0	2.5	12	45	5.0
HNSP-06	90°	140°	6.0	3.0	15	50	6.0
HNSP-08	90°	140°	8.0	4.0	20	60	8.0
HNSP-10	90°	140°	10.0	5.0	22	75	10.0
HNSP-12	90°	140°	12.0	6.0	25	75	12.0
HNSP-16	90°	140°	16.0	8.0	40	100	16.0
HNSPS-08	90°	140°	8.0	4.0	20	50	8.0
HNSPS-10	90°	140°	10.0	5.0	20	50	10.0
HNSPS-12	90°	140°	12.0	6.0	20	50	12.0

