

SC-63系列 SC-63 SERIES


固定細長型高速中負荷迴轉頂針 Fixed Long Type High Speed Medium Duty Live Center

用途：

本頂針適合300 mm長以內一般軸心車削加工，本頂針軸承，徑向力和軸向力分開設計，採用雙列滾珠軸承、滾珠止推軸承，和NK型滾針軸承結構製成。

Application:

The series of live center is suitable for turning workpiece length within 300mm. The bearings in the live center provide separated radial and axial resistant force. The bearings consist of double-row ball bearing, thrust ball bearing and NK type needle bearing.

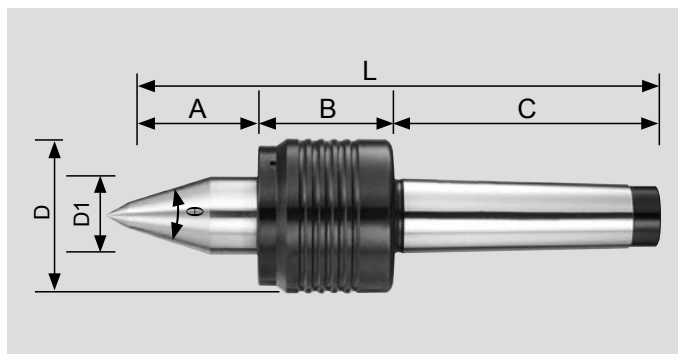

尺寸表 DIMENSIONS

精準度：0.008mm/m內
Accuracy: within 0.008mm/m

型式/外表尺寸 Model / Size	MT	A	B	C	D	D1	L	θ	軸承最高轉數 Max. Bearing Speed	軸承徑向力 Bearing Radial Force	軸承軸向力 Bearing Axial Force
SC-63-M-4	4	60	55	108	64	32.4	223	60°	4500.rpm	1300kg	2250kg
SC-63-M-4-A	4	60	72	108	64	32.4	240	60°	4500.rpm	1300kg	2250kg
SC-63-M-5	5	60	56	135	68	32.4	251	60°	4500.rpm	1300kg	2250kg
SC-63-M-5A	5	60	72	135	68	32.4	268	60°	4500.rpm	1300kg	2250kg

單位/Unit : mm

SC-65系列 SC-65 SERIES



替換型重負荷迴轉頂針 Interchangeable Heavy Duty Live Center

用途：

本頂針適合400 mm長以內一般車削加工。本頂針軸承，徑向力和軸向力分開設計，採用雙列滾珠軸承、滾珠止推軸承，和NK型滾針軸承結構製成。

Application:

The series of live center is suitable for turning workpiece length within 400mm. The bearings in the live center provide separated radial and axial resistant force. The bearings consist of double-row ball bearing, thrust ball bearing and NK type needle bearing.

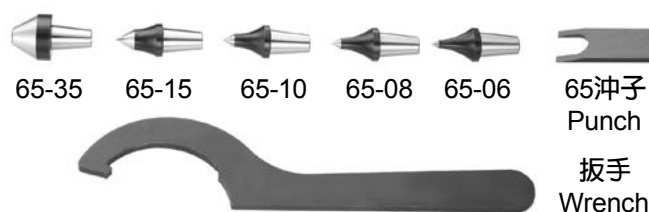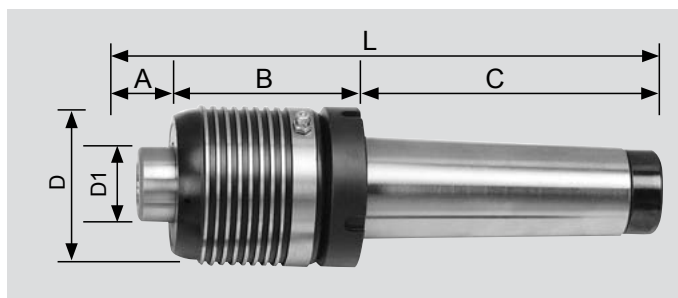

尺寸表 DIMENSIONS

精準度：0.008mm/m內
Accuracy: within 0.008mm/m

型式/外表尺寸 Model / Size	MT	A	B	C	D	D1	L	軸承最高轉數 Max. Bearing Speed	軸承徑向力 Bearing Radial Force	軸承軸向力 Bearing Axial Force
SC-65-H-4	4	12	56	108	63	32.4	176	4000.rpm	1420kg	2760kg
SC-65-H-4A	4	12	73	108	68	32.4	188	4000.rpm	1420kg	2760kg
SC-65-H-5	5	12	56	135	68	32.4	203	4000.rpm	1420kg	2760kg
SC-65-H-5A	5	12	73	135	68	32.4	215	4000.rpm	1420kg	2760kg

單位/Unit : mm