

焊刃式錫鋼被覆鑽頭

TUNGSTEN CARBIDE WELDED COATED DRILL




- 焊接式
- 中心內冷
- Welded End
- Internal Coolant

適合材質：

一般鋼料、合金鋼、模具鋼、不鏽鋼、銅、鋁、鑄鐵。

Applicable materials:

General steel, alloy steel, mold steel, stainless steel, copper, aluminum, cast iron.

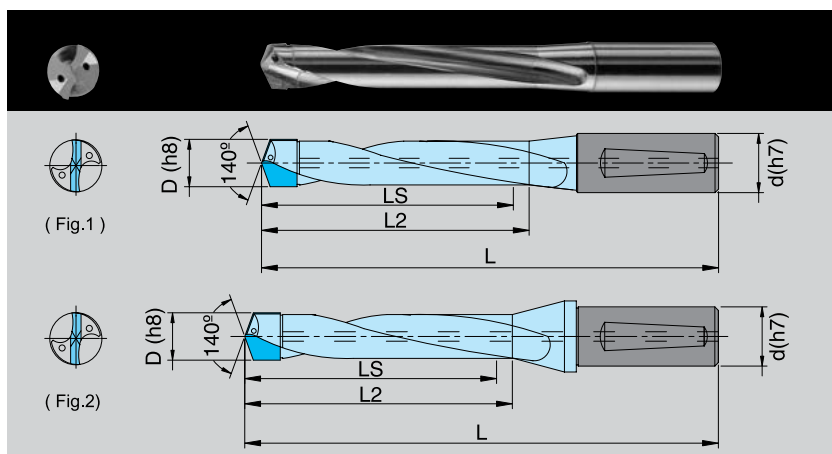

EDP No.	庫存品 stock	非庫存品 no-stock	dø	L ₂	L	L ₄	L _s	圖示
	Dø	刃徑的範圍						
TXD -7130	13	13.0~13.5	16	105	166	48	100	Fig.1
TXD -7135	13.5							
TXD -7140	14							
TXD -7145	14.5							
TXD -7150	15	14.51~15.5	20	120	185	50	114	Fig.1
TXD -7155	15.5							
TXD -7160	16							
TXD -7165	16.5							
TXD -7170	17	16.51~17.5	25	132	200	56	125	Fig.1
TXD -7175	17.5							
TXD -7180	18							
TXD -7185	18.5							
TXD -7190	19	18.51~19.5	32	142	210	60	134	Fig.1
TXD -7195	19.5							
TXD -7200	20							
TXD -7205	20.5							
TXD -7210	21	20.51~21.5	36	164	240	60	156	Fig.1
TXD -7215	21.5							
TXD -7220	22							
TXD -7225	22.5							
TXD -7230	23	22.51~23.5	40	177	255	60	168	Fig.1
TXD -7235	23.5							
TXD -7240	24							
TXD -7245	24.5							
TXD -7250	25	24.51~25.5	44	186	270	60	177	Fig.1
TXD -7255	25.5							
TXD -7260	26							
TXD -7265	26.5							

EDP No.	庫存品 stock	非庫存品 no-stock	dø	L ₂	L	L ₄	L _s	圖示
	Dø	刃徑的範圍						
TXD -7270	27	20.61~27.5	32	215	300	70	205	Fig.1
TXD -7275	27.5							
TXD -7280	28							
TXD -7285	28.5							
TXD -7290	29	28.51~29.5	36	225	315	70	215	Fig.1
TXD -7295	29.5							
TXD -7300	30							
TXD -7305	30.5							
TXD -7310	31	30.51~31.5	40	235	325	70	225	Fig.1
TXD -7315	31.5							
TXD -7320	32							
TXD -7325	32.5							
TXD -7330	33	32.51~33.5	44	248	355	70	236	Fig.2
TXD -7335	33.5							
TXD -7340	34							
TXD -7345	34.5							
TXD -7350	35	34.51~35.5	48	263	370	70	250	Fig.2
TXD -7355	35.5							

Dø/ Diameter
L₂/ Flute Length
L₄/ Shank Length
dø/ Shank Diameter
L/ Overall Length
L_s/ Length of Cut